




### Absorptive 0.5-43.5GHz Coaxial SP32T Switch

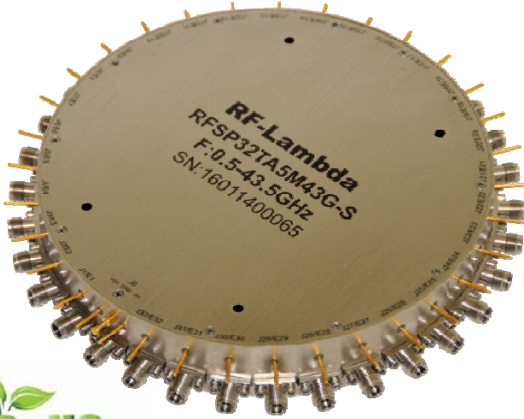

#### Features

- Ultra Wide Band Operation 0.5-43.5GHz
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -45°C~+85°C
- Customization available upon request
- Hermetically sealed package up to 60,000ft available upon request.

Electrical Specifications, TA = +25° C, With Vdd = +5V, Vss = -5V & VCTL = 0/ +5V

Description	PN: RFSP32TA5M43G			
	SP32T Absorptive Switch			
	Low Power Cold Switching			
Parameters	Min	Typ.	Max	Units
Frequency Range	0.5-43.5			GHz
Insertion Loss		28		dB
Insertion Loss Temperature Coefficient		0.02		dB/°C
Isolation	50	60		dB
Input VSWR		1.5	2	ratio
Output VSWR		1.5	2	ratio
RF Input power (CW)			0.5	W
Power Dissipation (CW)				W
Po.1dB			30	dBm
IM3				dBc
IIP3		50		dBm
Switching Speed			70	ns
Weight	/			ounces
Impedance	50			Ω
Biasing(+5V/-5V)	/			mA
Input /Output Connector	SMA-Female/SMA-Female (Standard)			
Finishing	Gold Plating			
Material	Aluminum			
Seal	Hermetically Sealed ( optional )			

Absorptive Coaxial Single Pole Thirty-two Throw Switch 0.5-43.5GHz



### Absolute Maximum Ratings

Biassing	+5V±10%/-5V±10%
TTL Control Voltage	0~0.8V/2~5V
Operating Temperature(°C)	-45 ~ +85
Storage Temperature(°C)	-50 ~ +125

### Environment specifications


Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) ( Optional )
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msc half sin wave,3 axis both directions

### Ordering Information

Part No	ECCN	Description
RFSP32TA5M43G	EAR99	SP32T 0.5-43.5GHz PIN Diode Switch

### Outline Drawing:

All Dimensions in mm ( inches )

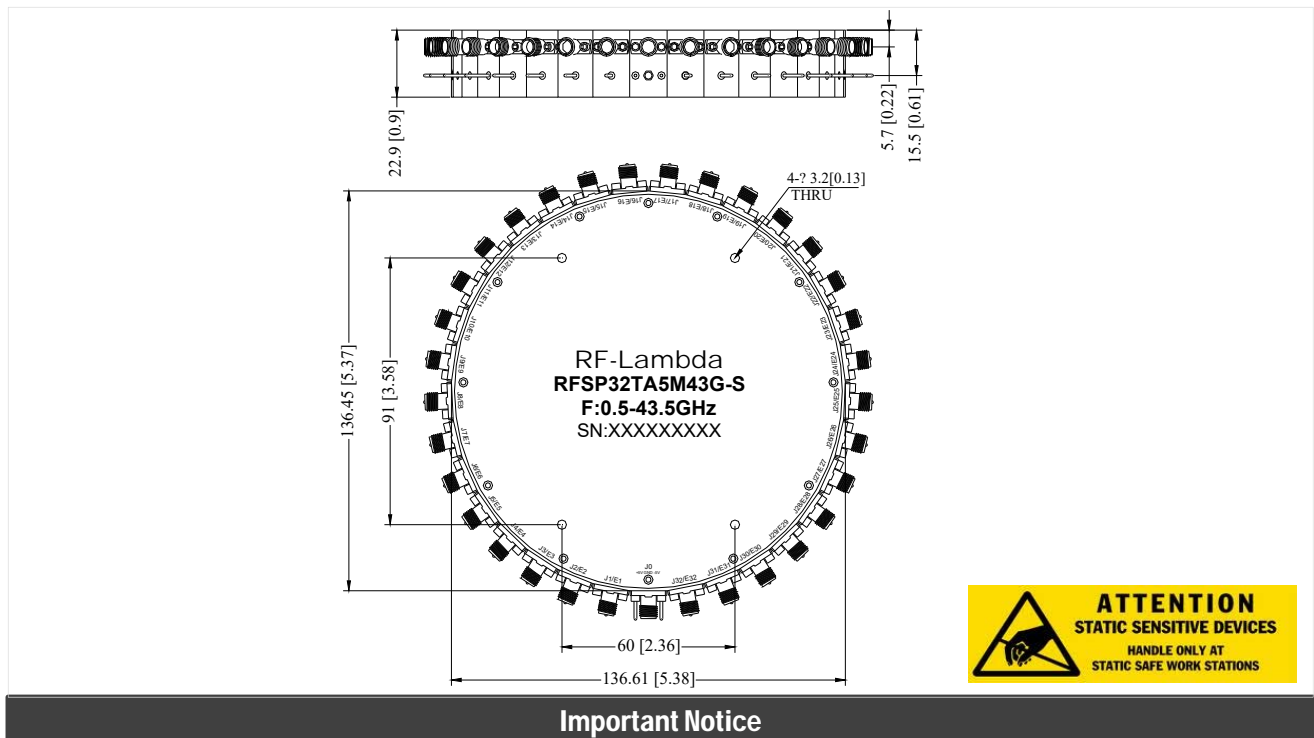

### Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Absorptive Coaxial Single Pole Thirty-two Throw Switch 0.5-43.5GHz